




Regavent 250R Central Unit

Performance Curve

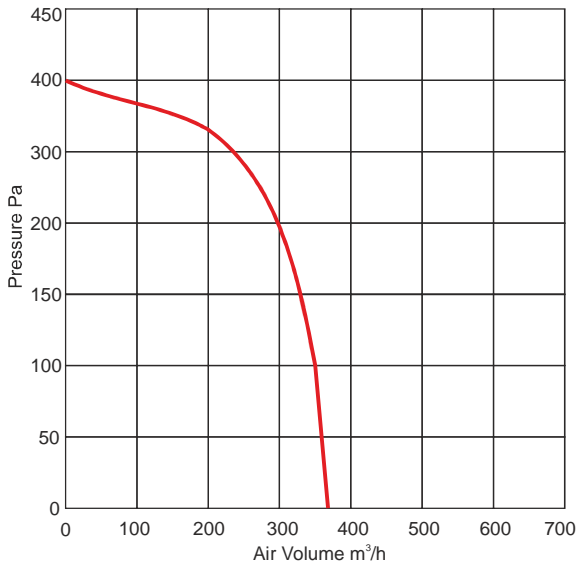


Features


- Capable of delivering up to 80 l/s of air volume. (Suitable for houses of up to 210m²)
- 125mm Duct connections.
- Low power consumption EC motors.
- Acoustically lined, complete with anti-vibration mounting bracket to provide virtually silent operation.
- Supplied with built in humidistat controller. Automatically boosts air flow to remove excess moisture from the atmosphere.
- Durable galvanised steel construction.
- Manufactured in the UK.
- Can be fitted with a summer bypass unit to provide automatic summer operation.
- Pollen filters available.

Dimensions

Wall

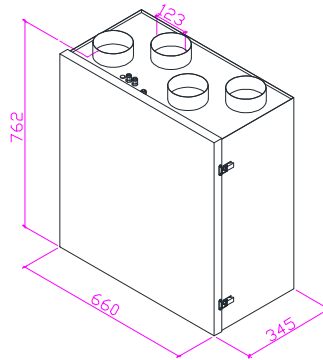

Loft

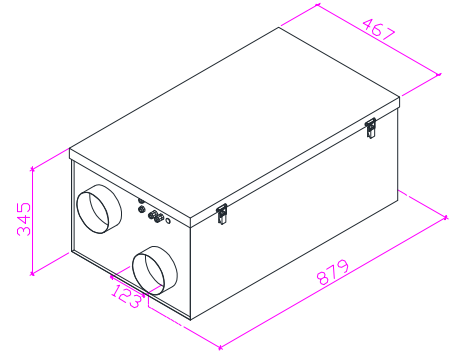

Technical Specification

- Air volume max. 240m³/h
- Air volume min. 50m³/h
- Voltage 230/240v AC
- Max power usage 82 watts
- Max current draw 0.60 amp

Unit Efficiency


250R	Kitchen + 1 additional wet room	Kitchen + 2 additional wet rooms	Kitchen + 3 additional wet rooms	Kitchen + 4 additional wet rooms	Kitchen + 5 additional wet rooms	Kitchen + 6 additional wet rooms	Kitchen + 7 additional wet rooms
Specific Fan power (w/l/s)	0.6	0.62	0.68	0.82	0.96	1.13	1.34
Efficiency	88	88	87	86	85	85	84





Regavent 300R Central Unit

Performance Curve

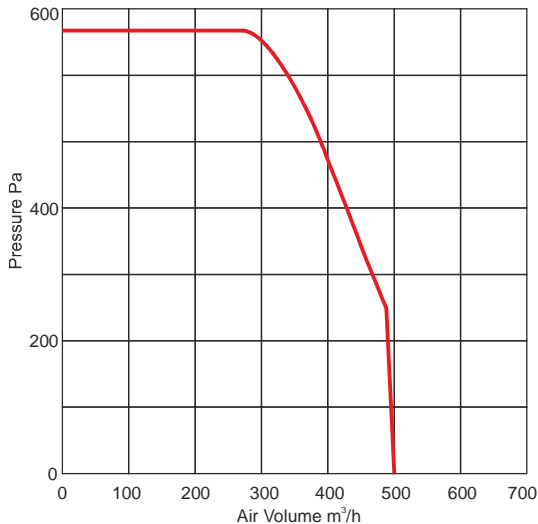


Features


- Capable of delivering up to 100 l/s of air volume. (Suitable for houses of up to 270m²)
- 150mm Duct connections.
- Low power consumption EC motors.
- Acoustically lined and complete with anti-vibration mounting bracket to provide virtually silent operation.
- Supplied with built in humidistat controller. Automatically boosts air flow to remove excess moisture from the atmosphere.
- Durable galvanised steel construction
- Manufactured in the UK.
- Can be fitted with a summer bypass unit to provide automatic summer operation.
- Pollen filters available.

Dimensions

Wall



Loft

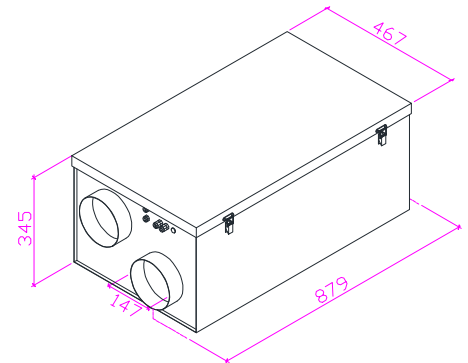

Technical Specification

- Air volume max. 340m³/h
- Air volume min. 80m³/h
- Voltage 230/240v AC
- Max power usage 132 watts
- Max current draw 1.0 amp

Unit Efficiency


300R	Kitchen + 1 additional wet room	Kitchen + 2 additional wet rooms	Kitchen + 3 additional wet rooms	Kitchen + 4 additional wet rooms	Kitchen + 5 additional wet rooms	Kitchen + 6 additional wet rooms	Kitchen + 7 additional wet rooms
Specific Fan power (w/l/s)	0.73	0.69	0.73	0.82	0.9	1.06	1.23
Efficiency	90	89	89	88	87	87	86





Regavent 600R Central Unit

Performance Curve

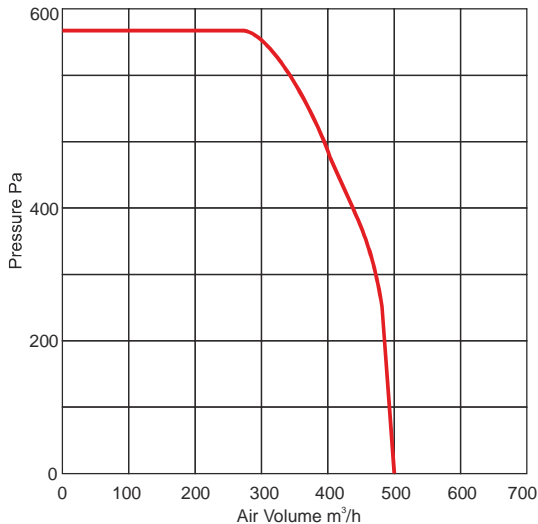

Features


- Capable of delivering up to 130 l/s of air volume. (Suitable for houses of up to 370m²)
- 160mm Duct connections.
- Low power consumption EC motors.
- Acoustically lined and complete with anti-vibration mounting bracket to provide virtually silent operation.
- Supplied with built in humidistat controller. Automatically boosts air flow to remove excess moisture from the atmosphere.
- Durable galvanised steel construction
- Manufactured in the UK.
- Can be fitted with a summer bypass unit to provide automatic summer operation.
- Pollen filters available.

Dimensions


Technical Specification

- Air volume max. 500m³/h
- Air volume min. 70m³/h
- Voltage 230/240v AC
- Max power usage 208 watts
- Max current draw 1.76 amp

Wall



Loft

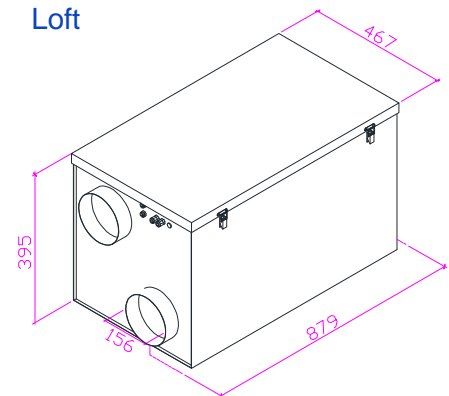

Unit Efficiency

600R	Kitchen + 1 additional wet room	Kitchen + 2 additional wet rooms	Kitchen + 3 additional wet rooms	Kitchen + 4 additional wet rooms	Kitchen + 5 additional wet rooms	Kitchen + 6 additional wet rooms	Kitchen + 7 additional wet rooms
Specific Fan power (w/l/s)	-	-	-	0.51	0.58	0.68	0.79
Efficiency	-	-	-	90	90	89	89

